



Self-loading rifle suppressors

## G.I.S. RSR2240 WB STEEL AK

FOR AK-74 and AKS-74U (5,45x39)

## G.I.S. RSR3040 WB STEEL AK

FOR AK-47 and AKM (7,62x39)

The G.I.S. **RSR WB Steel** suppressors are designed primarily for armed forces.

We offer specific **models dedicated for AK family rifles in 5,45x39 caliber** (G.I.S. RSR2240 WB Steel AK) with M24x1,5 muzzle thread **and for 7,62x39 caliber** rifles (G.I.S. RSR3040 WB Steel AK) with M14x1L muzzle thread.


Both models are equipped with cogs fitting in original rifle's muzzle device locking mechanism.




**G.I.S. RSR2240 WB Steel AK in 5,45x39 caliber comes in two sub-variants** depending on length of barrel thread which is different between AK-74 and AKS-74U models. This suppressors has an unique rear cap for M24x1,5 threads, while G.I.S. RSR3040 WB Steel AK 7,62x39 variant is our standard 5,56x45/.223 Rem. suppressor fitted with special thread adapter for M14x1L thread and locking cogs.



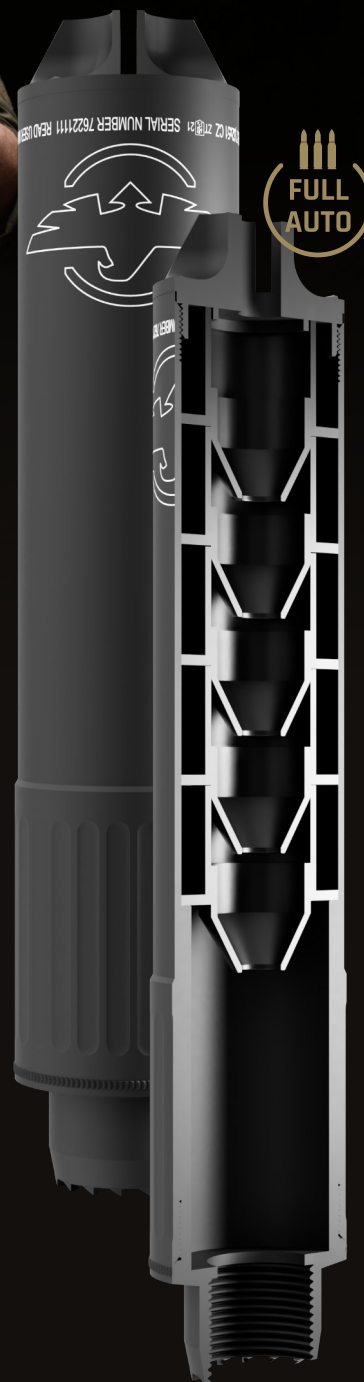


Therefore, a special emphasis was put in their development and production on maximum durability when **firing in full auto**, even with the use of supersonic ammunition. The front face is made of grade 15 hardened steel and, like all other the components, is nitrided in order to increase the resistance against damage and corrosion. Therefore, it functions not only as an efficient flash suppressor and protection against the ingress of dirt into the suppressor, it can also be used as a very efficient window breaker for forced entry into vehicles and buildings.

In order to achieve the maximum efficiency and durability in use under the most demanding conditions, the basic material used for manufacturing of the RSR WB Steel models is nitrided steel.

For safety reasons, the RSR WB Steel suppressors cannot be disassembled. However, they can be cleaned chemically.



-  **Caliber:**  
5,45x39 (RSR2240 WB Steel AK)  
7,62x39 (RSR3040 WB Steel AK)
-  **Sound suppression:**  
5,45x39 - up to 35 dB  
7,62x39 - up to 28 dB
-  **Overall length:**  
RSR2240 WB Steel AK-74 - 180 mm  
RSR2240 WB Steel AKS-74U - 186 mm  
RSR3040 WB Steel AK47/AKM - 187 mm

-  **Diameter:** 40 mm
-  **Weight:**  
RSR2240 WB Steel AK-74 - 547 g  
RSR2240 EB Steel AKS-74U - 555 g  
RSR3040 WB Steel AK47/AKM - 625 g
-  **Basic material:**  
High-strength steel - nitrided
-  **Color:** black
-  **Muzzle thread:**  
M14x1L AK-47/AKM, M24x1,5 AK-74/AKS-74U



FRONT VIEW  
ALL RSR WB Steel models



G.I.S. RSR2240 WB Steel AK  
5,45x39 REAR CAP  
(M24x1,5 thread)



G.I.S. RSR3040 WB Steel AK  
7,62x39 REAR CAP



THREAD ADAPTER  
7,62x39 AK  
(M14x1L thread)